 U.S. ENVIRONMENTAL PROTECTION AGENCY Office of Pesticide Programs Antimicrobials Division (7510P) 1200 Pennsylvania Avenue NW Washington, D.C. 20460	EPA Reg. Number: 9339-33	Date of Issuance: NOV 13 2013
	Term of Issuance: Conditional	
	Name of Pesticide Product: Armor Antifoulant	

NOTICE OF PESTICIDE:
☒ **Registration**
☐ **Reregistration**
(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):
Flexabar Corp
1969 Rutgers University Blvd
Lakewood, New Jersey 08701

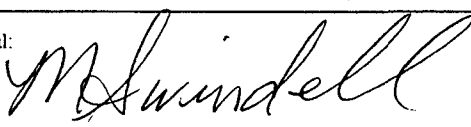
Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act. Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

The application referred to above, submitted under the Federal Insecticide, Fungicide and Rodenticide Act, as amended is acceptable under FIFRA sec. 3(c)(7)(A) provided that you:

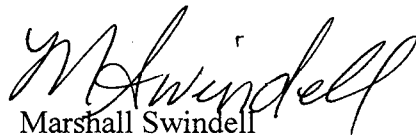
1. Submit and/or cite all data required for registration/reregistration/registration review of your product when the Agency requires all registrants of similar products to submit such data.
 - a. The Tralopyril DCI will be issued in 2014, and you are responsible for addressing the data requirements outlined in the data call-in. A copy of the DCI can be located in the Docket for this active ingredient <http://www.regulations.gov/#!documentDetail;D=EPA-HQ-OPP-2013-0217-0002>. A copy of the EDSP Order can be located http://www.epa.gov/endo/pubs/edsp_orders_status.pdf. If you have specific questions about the DCI, contact Wanda Henson at 703-308-6345.
2. Submit a one-year study required to satisfy the storage stability and corrosion characteristics requirements (Guidelines 830.6317 and 830.6320). You have 18 months from the date of registration to provide these data.

A stamped copy of your labeling is enclosed for your records. Submit a final printed label before distributing or selling this product. The basic CSF dated 4/5/13 was found to be acceptable.

Signature of Approving Official:  Marshall Swindell Product Manager Team 33 Regulatory Management Branch Antimicrobials Division (7510P)	Date: NOV 13 2013
--	---------------------------------

If you have questions concerning this matter, please contact me at (703) 308-6341 or by email at Swindell.Marshall@epa.gov or Elizabeth Watkins at (703) 347-0241 or by email at Watkins.Elizabeth@epa.gov

Sincerely,

A handwritten signature in black ink, appearing to read "M. Swindell". The signature is fluid and cursive, with the first letter "M" being large and prominent.

Marshall Swindell
Product Manager (33), RMBI
Antimicrobials Division (7510P)

Enclosure: Stamped label

Revised 11/13/13

**Flexdel
Armor
Antifoulant Paint
For Fiberglass, Wood & Aluminum**

- Contains E-cone
- Prevents Slime & Algae
- Withstands Frequent Trailing and Launching
- Copper Free
- Ablative

ACTIVE INGREDIENTS:

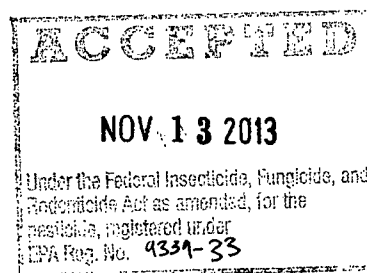
Tralopyril 5.60%

Zinc Pyrithione 4.10%

OTHER INGREDIENTS 90.30%

Total 100.0%

Contains Petroleum Distillates & Xylene



EPA Reg. No. 9339-33

EPA Est. No. 9339- NJ-01

**KEEP OUT OF REACH OF CHILDREN
CAUTION**

See side panel for additional precautionary statements

Manufactured for Flexdel Corporation
1969 Rutgers University Blvd., Lakewood, NJ 08701 USA
888.353.9335
Made in U.S.A. Printed in U.S.A.

Revised 11/13/13

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling

Product Description:

Armor is a copper free antifouling paint that provides excellent protection from algae, shell and weed fouling. Armor uses Ecomea to ward off barnacles and zebra mussels. The high end copolymer ablative technology was formulated to prevent the attachment of both plant and animal fouling on vessels immersed in salt, fresh, and "brackish" water.

1A) Surface preparation: New / Bare Fiberglass Hulls:

Wipe down surface with Aquagard 180 Wash & Dewaxer. Change rags frequently to assure complete removal of wax and mold release agent & contaminants. Sand surface thoroughly with 80 or 100 grit sand paper. Wipe down surface again with Aquagard 180 Wash & Dewaxer to remove sanding residue and immediately apply one (1) coats of Aquagard Primer with a roller or brush. Allow Primer to dry for minimum of two (2) hours.

1B) Surface preparation: For previously painted surface:

To prepare the surface for coating, remove all loose coating and fouling residue by either washing with high pressure water, scraping or by sanding. Apply a small patch of Flexdel Armor Antifoulant to test compatibility with the old paint. If Flexdel Armor Antifoulant cracks or lifts, all the old paint will have to be removed. Then follow the "Bare Fiberglass Hulls" system specified above. If nothing appears to happen when this product is applied, let the test patch dry for several hours and then scrape this product to see if it is adhering to the old paint satisfactorily. If the adhesion looks good, sand the entire surface thoroughly with 80 grit sandpaper.

Previously painted surfaces in poor condition (such as chipping, peeling or flaking) should be stripped to bare fiberglass. Then proceed with the "Bare Fiberglass Hulls" preparation.

1C) Surface preparation: Bare Aluminum:

Clean the hull surface thoroughly with de-waxing solvent and plenty of clean rags. Sand the de-waxed hull lightly with 80-grit paper. Wipe

down the area again to remove all sanding residue. Now apply 190 Primer. Follow the manufactures recommendations for primer application

2) Application:

A clean dry surface (free of scale, corrosion, dirt, grease, oil, marine fouling, or other foreign matter) will provide the optimum performance of this coating, when used for either complete coating or touch-up. Wipe down surface with Aquagard 180 Wash & Dewaxer. Inadequate surface preparation will result in unsatisfactory performance. Mix the coating thoroughly for a minimum of five (5) minutes to insure complete pigment reincorporation. Apply by either brush or roller. Flexdel Armor Antifoulant should be applied at or above 50°F. Apply two (2) coats of Flexdel Armor Antifoulant. Allow four (4) hours drying time between coats. Let final coat dry eight - twelve (8-12) hours before launching the boat. The theoretical coverage of this product is approximately 400 square feet per gallon. Clean up with paint thinner or white spirits when finished.

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Flexdel Corp. including environmental conditions. Therefore, Flexdel Corp. cannot guarantee this product's suitability for your particular purpose of application. Implied warranties of fitness for particular purpose and of merchantability are excluded. Flexdel Corp. shall not under any circumstances, be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Flexdel Corp., option.

Revised 11/13/13

PRECAUTIONARY STATEMENTS**HAZARD TO HUMANS AND DOMESTIC ANIMALS
CONTAINS PETROLEUM DISTILLATE**

CAUTION: Causes moderate eye irritation. Harmful if swallowed. Avoid contact with skin or clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Wear long-sleeved shirt and long pants, socks, shoes, and gloves. Avoid contact with eyes or clothing. Wear protective eyewear. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

KEEP OUT OF REACH OF CHILDREN**FIRST AID**

If Swallowed: Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give anything to an unconscious person.

If On Skin or Clothing: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment.

If In Eyes: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice.

NOTE TO PHYSICIAN: May pose an aspiration pneumonia hazard. Contains petroleum distillate.

Toll Free Emergency: For additional information in case of emergency, call toll free ChemTrec at **1-800-424-9300**. Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

Revised 11/13/13

ENVIRONMENTAL HAZARDS: This paint is toxic to birds, fish and aquatic invertebrates, oysters and shrimp. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit, and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewage systems without previously notifying the sewage plant authority. For guidance contact your State Water Board or Regional Office of the U.S. Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near heat or open flame.

STORAGE AND DISPOSAL: Do not contaminate water, food or feed by storage or disposal.

PESTICIDE STORAGE: Always store in the original container, and keep partially used container tightly sealed. If a leaky container must be contained within another, mark the outer container to identify the contents. The storage area must be dry, well-lit and well ventilated. Keep storage areas clean. Clean up any spills promptly. Protect containers from extreme heat and cold.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticides or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or hazardous waste representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING: Non-refillable container. Do not reuse or refill this container. If empty, let paint dry on the walls of the container by keeping lid open and exposed to air in a well ventilated location. When dry, place in trash for disposal in a sanitary landfill or offer for recycling if available. If partially filled, call your local solid waste agency for disposal instructions. Never place unused product down any indoor or outdoor drain.